




"COOL ONE" Control Transformer
For Use with Anacon's SCR Controller Cards requiring 24Vac

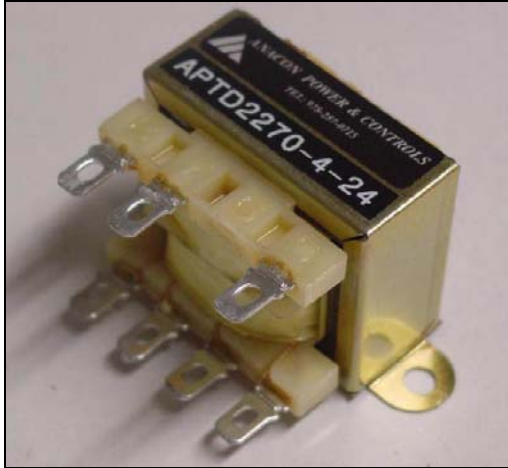

Part Number: APTD2270-4-24

Anacon's "Cool One" control transformers provide superior isolation and low capacitive coupling.

Standard "COOL ONE" Features:

- Available in rating of 6VA
- Available in dual primaries (120, 208, and 240 Vac)
- Secondary RMS Rating of 24VCT @ 0.25A
- Split bobbin construction eliminates need for electrostatic shielding
- Designed with solderlug/quick connect type terminals 0.187" wide
- Hi Pot tested at 2500VRMS
- Manufactured to Class B (130°C) insulation

DUAL PRIMARY WIRING LAYOUT – 120V Connection	DUAL PRIMARY WIRING LAYOUT – 240V Connection														
<p>● Indicates polarity</p>	<p>● Indicates polarity</p>														
MECHANICAL DRAWING	DIMENSIONS														
<p>3/16 DIA. MTG. HOLES (2) 3/16 (.187) QUICK-CONNECT OR SOLDER LUG TERMINALS SECONDARY TERMINALS FINISH TAP START PRIMARY TERMINALS SINGLE 115V PRIMARY TERMINALS DUAL 115V/230 V TERMINALS</p>	<table border="1"> <tr><td>L =</td><td>2.37"</td></tr> <tr><td>W =</td><td>1.25"</td></tr> <tr><td>H =</td><td>1.37"</td></tr> <tr><td>A =</td><td>1.68"</td></tr> <tr><td>B =</td><td>0.68"</td></tr> <tr><td>ML =</td><td>2.00"</td></tr> <tr><td>Wgt =</td><td>0.44 lbs.</td></tr> </table>	L =	2.37"	W =	1.25"	H =	1.37"	A =	1.68"	B =	0.68"	ML =	2.00"	Wgt =	0.44 lbs.
L =	2.37"														
W =	1.25"														
H =	1.37"														
A =	1.68"														
B =	0.68"														
ML =	2.00"														
Wgt =	0.44 lbs.														